

# Installation Guide

## For Studer "B" Cables

TIMELINE VISTA, INC.  
1755 LA COSTA MEADOWS DRIVE, SUITE B  
SAN MARCOS, CA 92069  
TEL. 760-761-4440  
(FAX 760-761-4449)  
SUPPORT@DIGAUDIO.COM

---

**DATE:** 02/05/93

**MODEL:** Lynx Time Code Module  
Lynx-2 Time Code Module

**REVISION:** All

**SERIAL NO:** All

**SOFTWARE:** All

**REQUIRED PARTS:**

Lynx Time Code Module  
Studer "B" Cable, with "serial card interface", TimeLine P/N 71C033

Lynx-2 Time Code Module  
Studer "B" Cable, TimeLine P/N 71C034

Studer Machine  
Serial Interface, Studer P/N 1.810.752.00  
(Not required for A-807, which has serial interface built-in)

**DESCRIPTION:**

TimeLine Studer Serial Interface will allow:

- Serial machine control
- Individual track select from KCU
- Improved locates and searches

**PROCEDURE:**

On all but the A-807, the studer serial interface is an optional part from Studer. It is built-in on the A-807. Studer Serial Interface, part number 1.810.752.00, is required for all other machines.

**Software requirements for individual Studer machines are:**

A-807 = 10/89 or later (Serial control only available on machines with serial numbers higher than 08807)

A-810 = 6/89 or later

A-812 = 4/90 or later

A-820 (2 track) = 6/89 or later

A-820 (multi) = 2/90 or later

A-827 = 5/91 or later

**PROCEDURE Continued**

**Studer serial port mode/settings for A-820 and A-827:**

- 9600 baud
- No parity
- One stop bit
- No echo

**Other Studer settings:**

A-820/A-827: Auto input should be switched off on TC track to improve search and park accuracy, as well as lock-up time.

A-820 (2 track): Switch DELAY OFF for fastest lock-up time.

---


**Warning**

Rehearse functions on A-820/A-827:

1. Check menu 44. Must be set to DELAY ON, otherwise machine will go into **RECORD** when rehearse is issued.
  2. If the delay inhibit switch on the Studer machine remote unit is on, the machine will go into **RECORD** when rehearse is issued.
- 

**Cables**

Older TimeLine Lynx cables may not have the rehearse line connected.

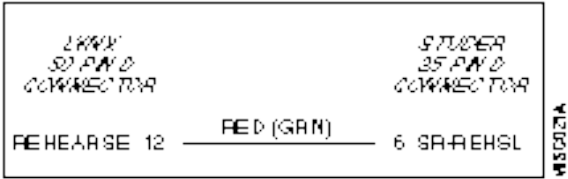

**Figure 1. Rehearse Pin Connector**